



DYREC 280-320

Centralized Heat Recovery Units
Vertical installation



Up to 10 rooms

Complies with ErP Directive 2009/125/CE
and EU Regulation 1253/2014
Residential Ventilation Unit

Energy class A (DYREC 320)

- Thermal efficiency up to **93%**
- High energy saving thanks to EC motors

FEATURES

- Centralized heat recovery unit for vertical installation.
- Suitable for $\varnothing$ 125 mm ducting system.
- Casing made in galvanized steel sheet with epoxy finish
- Internal panels in PPE for a perfect thermal and acoustic insulation.
- Integrate or optional by-pass.
- Multispeed high efficiency motors.
- Low sound level.
- Integrated filter system class G4.
- Supplied with RLS 1WR control panel (EC motor versions).
- IPX4.
- Complies with EN 60335-2-80, LVD 2014/35/EU, EMC 2014/30/EU.
- Performance measured according to EN 13141-7, EN 5801 and EN 308.
- CE marked.

PERFORMANCE

MODEL	m ³ /h max	l/s max	V	W max	A max	dB (A)*	Kg
DYREC 280 AC	280	78	230	236	1	26	27,5
DYREC 320 EC	320	89	230	140	1,20	26	28

* Lp(A) at 3 m in open field at the maximum aeratic efficiency point
(min. speed AC version and speed setting 60% EC version)

MODELS

DYREC 280 AC



- Provided with external rotor motor and forward blade impeller 2 speed running: continuous running at the minimum speed, maximum speed is activated through remote control.
- Ideal for houses up to **10 rooms**.
- Installation configuration: **5 intake points and 5 extract points**.
- Max airflow **280 m³/h**.
- High efficiency heat recovery: **93%**.
- Made in steel with epoxy finish.
- Ducting system $\varnothing$ 125 mm.
- Integrated filter system class G4, easily removable.
- Integrated by-pass.**
- AC motor.**

DYREC 320 EC



- Provided with brushless motor for an optimal combination between high performance, silence and low energy consumption.
- Ideal for houses up to **10 rooms**.
- Installation configuration: **5 intake points and 5 extract points**.
- Max airflow **320 m³/h**.
- High efficiency heat recovery: **93%**.
- Made in steel with epoxy finish.
- Ducting system $\varnothing$ 125 mm.
- Integrated filter system class G4, easily removable.
- Integrated by-pass.**
- EC motor.**

CONTROLLER - SUPPLIED

RLS 1 WR

- Remote control
- Manual selection of three modality of continuous running:
 - I - Low ventilation modality
 - II - Intermediate ventilation modality
 - III - Intensive ventilation modality
- Weight 0,50 Kg
- Dimensions 75 x 75 x 30



Supplied with DYREC 320

ACCESSORY

RLS 3V - 3 speeds

- Remote 3 speed control (Min/Max) and On/Off switch
- New design with cover
- Suitable for surface or built-in installation
- Ease of connection by the means of removable terminals
- Protection IP42
- Weight 0,40 Kg
- Supply voltage 230V - 50/60 Hz
- Dimensions 110 x 80 x 42



Suitable for DYREC 280





DYREC 280-320


Centralized Heat Recovery Units
Vertical installation



CURVES

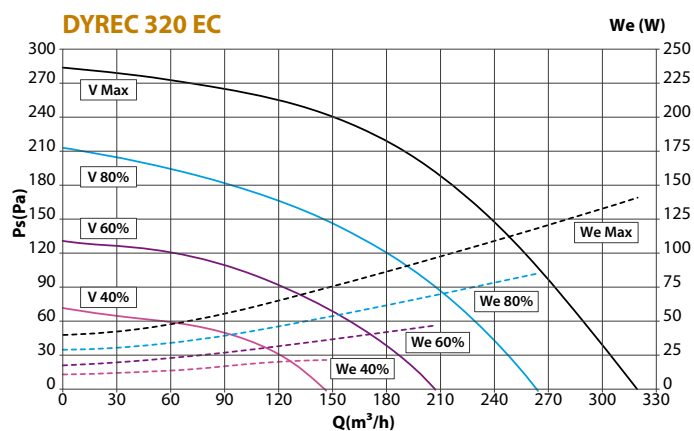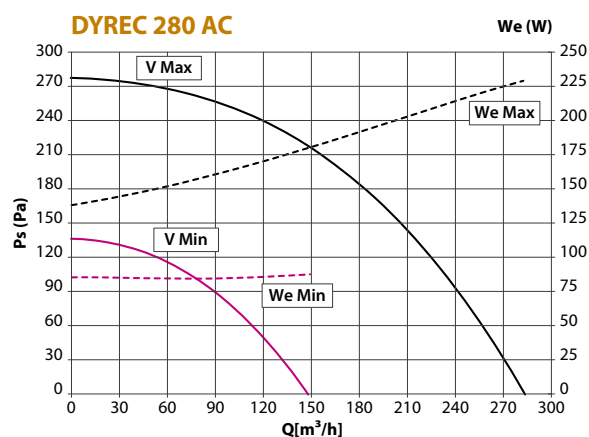

DIMENSIONS (mm)

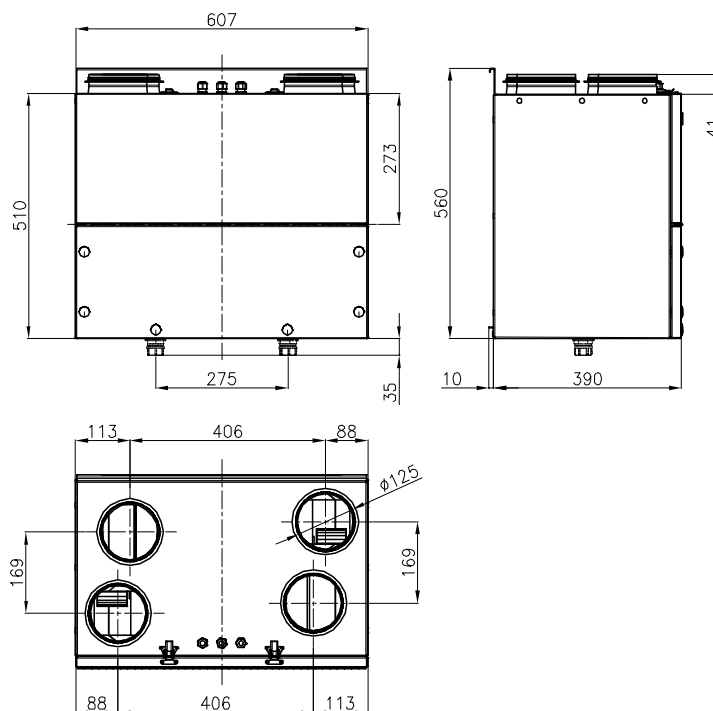

EFFICIENCY GRAPH

